

**Output Torque Range**  
13.4Nm to 57Nm

**Ratio**  
5:1 - 120:1



**Gearboxes**

**HPCPF55**

**Worm / Wheel Reduction**

**Hollow Input**

<b>WEIGHT</b>	3.04 Kg
<b>BACKLASH</b>	0° 30'
<b>HOURS LIFE</b>	12000 hr
<b>MAX INPUT SPEED</b>	3000 rpm
<b>MATERIAL:</b>	
<b>CASE MAT'L</b>	Aluminium HE30TF
<b>WORM MAT'L</b>	817M40(EN24)
<b>WHEEL MAT'L</b>	Alum. Bronze (AB2) with Steel Hub
<b>GREASED FOR LIFE</b>	Shell Gadus

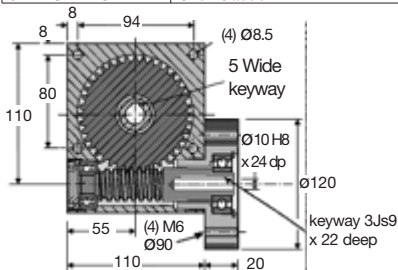

N.m.	RPM Input	Reduction ratio					
		10:1	12:1	15:1	20:1	30:1	60:1
Output Torque	3000	13.4	14.0	14.8	16.2	17.6	20.4
	2000	16.2	16.9	18.3	19.1	20.4	23.9
	1000	21.1	22.5	23.2	24.6	25.3	28.8
	500	27.4	28.1	28.8	30.2	31.6	35.1
	200	34.4	35.1	36.5	37.9	39.3	42.1
	100	40.0	41.4	42.1	42.8	44.9	46.3
	50	45.6	46.3	47.7	48.4	49.8	50.5
	10	56.8	56.8	56.8	57.0	57.0	57.0

DISCOUNTS	
1 - 5	List Price
6 - 19	-5%
20 - 49	-10%
50 - 99	-15%
100 +	-20%

PART NUMBER	Ratio	Max Input Speed	Max Output Speed	% Effi. at 1000 Rpm	Backdrive	PRICE EACH 1-5
HPCPF55-10	10:1	3000	300	89	YES	£354.31
HPCPF55-12	12:1	3000	250	88	YES	£354.31
HPCPF55-15	15:1	3000	200	86	YES	£354.31
HPCPF55-20	20:1	3000	150	84	YES	£354.31
HPCPF55-30	30:1	3000	100	78	YES/NO	£354.31
HPCPF55-60	60:1	3000	50	69	NO	£354.31
HPCPF55-S	5:1-120:1 SPECIAL RATIO					£407.18
HPCPF55-A	SPECIAL MINIMUM BACKLASH 0° 8' OF ARC					£562.56

Output Shafts: HPCPF55-X (Single), HPCPF55-DX (Double): See page 1.23.

Testing in your application is necessary. You will need to assess duty, cycles and confirm gearbox suitability with your own calculations. Torque figures are to be used for guidance only

Unit 14, Foxwood Industrial Park, Foxwood Rd. Chesterfield, Derbyshire S41 9RN  
Telephone +44(0)1246 268080 Fax +44(0)1246 260003



**1.13**

**Gearboxes** PRECISION WORM GEAR REDUCERS HPCPF55