

HPCFRND2




Body: Polycarbonate plastic

Gear: Polyacetal Plastic

Fluid: Silicone **Bi - Directional & Uni - Directional**

Mechanical

Rotary Dampers

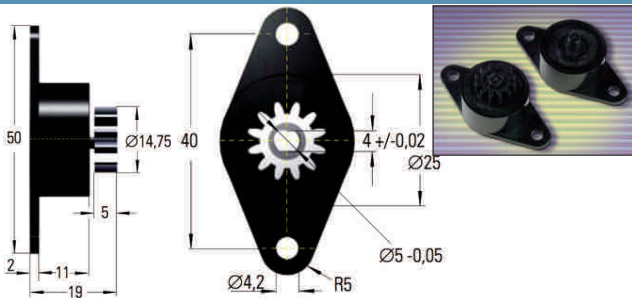

Material: polycarbonate plastic Temperature range: 0° C to 50° C

Tooth: Involute
 Module: 1.0
 Pressure angle: 20°
 Number of teeth: 12
 P.C.D.: 12.75 mm

DISCOUNTS

Quantity	List Price
1 - 24	-
25 - 49	-15%
50 - 99	-25%
100 - 249	-35%
250 - 499	-50%
500 +	-60%

PART NUMBER			Damping Torque Ncm (Nom. 20 rpm. 23° C)	Price Each 1-24
Bi-directional damping	R-hand damping (clockwise)	L-hand damping (anti-clockwise)		
	HPCFRND2R501G1	HPCFRND2L501G1	5 ± 1	£46.62
	HPCFRND2R102G1	HPCFRND2L102G1	10 ± 2	£46.62
	HPCFRND2R152G1	HPCFRND2L152G1	15 ± 3	£46.62
HPCFRND2501G1			5 ± 1	£40.85
HPCFRND2102G1			10 ± 2	£40.85
HPCFRND2152G1			15 ± 3	£40.85

1 mod matching plastic racks available up to 1 metre. Units are supplied with removable gears. 1 mod flexible racks are available up to 2 metre.

Unit 14, Foxwood Industrial Park, Foxwood Rd. Chesterfield, Derbyshire S41 9RN

Telephone +44(0)1246 268080 Fax +44(0)1246 260003



6.45