

Output Torque Range
2.5Nm to 8.8Nm

Ratio
5:1 - 120:1



Gearboxes

HPCPF30

Worm / Wheel Reduction

Hollow Input

WEIGHT	0.59 Kg
BACKLASH	0° 30' approx
HOURS LIFE	12000 hr
MAX INPUT SPEED	5000 rpm
MATERIAL:	
CASE MAT'L	Aluminium HE30TF
WORM MAT'L	817M40(EN24)
WHEEL MAT'L	Alum. Bronze (AB2)
GREASED FOR LIFE	Shell Gadus

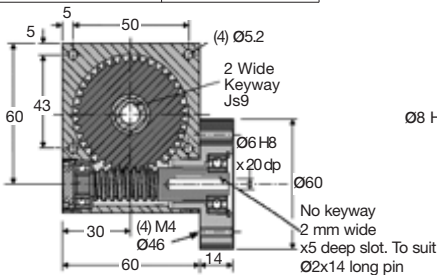

N.m.	RPM Input	Reduction ratio					
		10:1	12:1	15:1	20:1	30:1	60:1
Output Torque	3000	2.5	2.5	2.6	2.7	3.0	3.5
	2000	2.8	2.9	3.0	3.2	3.6	4.1
	1000	3.5	3.7	4.0	4.2	4.5	5.0
	500	4.6	4.7	4.9	5.1	5.3	5.8
	200	5.4	5.6	5.7	5.9	6.2	6.6
	100	6.0	6.0	6.5	6.5	7.0	7.5
	50	7.5	7.8	8.0	8.3	8.3	8.6
	10	8.0	8.0	8.3	8.5	8.5	8.8

DISCOUNTS	
Quantity	List Price
1 - 5	
6 - 19	-5%
20 - 49	-10%
50 - 99	-15%
100 +	-20%

PART NUMBER	Ratio	Max Input Speed	Max Output Speed	% Effi. at 1000 Rpm	Backdrive	PRICE EACH 1-5
HPCPF30-10	10:1	5000	500	90	YES	£189.38
HPCPF30-12	12:1	5000	416	88	YES	£189.38
HPCPF30-15	15:1	5000	333	86	YES	£189.38
HPCPF30-20	20:1	5000	250	84	YES	£189.38
HPCPF30-30	30:1	5000	166	78	YES/NO	£189.38
HPCPF30-60	60:1	5000	83	70	NO	£189.38
HPCPF30-S	5:1-120:1	SPECIAL RATIO				£250.28
HPCPF30-A	SPECIAL MINIMUM BACKLASH 0° 8' OF ARC					£333.59

Output Shafts: HPCP30-X (Single), HPCP30-DX (Double): See page 1.23.

Testing in your application is necessary. You will need to assess duty, cycles and confirm gearbox suitability with your own calculations. Torque figures are to be used for guidance only

Unit 14, Foxwood Industrial Park, Foxwood Rd. Chesterfield, Derbyshire S41 9RN
Telephone +44(0)1246 268080 Fax +44(0)1246 260003



1.7

Gearboxes PRECISION WORM GEAR REDUCERS HPCPF30