


Materials

Moulded Racks ZRM

STD : Hostaform

20° P.A.

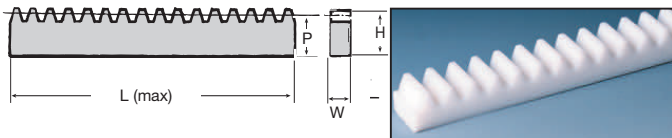

Straight Teeth

SPECIFICATIONS

Max. tensile strength	at 20°C 62 N/mm ²
	at 70°C 35 N/mm ²
Tensile elongation at breach	at 20°C 30%
	at 70°C 110%
Melting point	190°
Vicat softening temp	151°
Co-efficient of linear expansion between 20°C and 100°C	1.1 x 10 ⁻⁴
Auto ignition temp	427°C

DISCOUNTS

1 - 5	List Price
6 - 29	- 22%
30 - 99	- 44%
100 - 399	- 47%
400 - 999	- 50%
1000 - 5000	- 53%

PART NUMBER	MOD	P (mm)	W (mm)	H (mm)	L Max. (mm)	PRICE EACH 1 - 9
ZRM0.5-A250	0.50	4.00	4.00	4.50	250	£2.90
ZRM0.5-B250	0.50	5.50	4.00	6.00	250	£3.33
ZRM0.7-250	0.70	6.00	6.00	6.70	250	£5.87
ZRM1-250	1.00	8.00	9.00	9.00	250	£8.51
ZRM1.5-250	1.50	10.50	12.00	12.00	250	£13.31
ZRM2-250	2.00	9.00	15.40	11.00	250	£17.36
ZRM3-250	3.00	12.00	19.40	15.00	250	£26.47

Unit 14, Foxwood Ind., Park, Foxwood Rd., Chesterfield, Derbyshire S41 9RN

Telephone +44(0)1246 268080 Fax +44(0)1246 260003



22.11